

# Specifications:

Waterproof degree: IP68

Static electricity:  $\leq 30\text{mA}$

Ambient temperature:  $-45^{\circ}\text{C}\sim 60^{\circ}\text{C}$

Electric lock output:  $\leq 3\text{A}$

Short-circuit Protect:  $\leq 100\mu\text{S}$

Dimensions:  $120*56*20\text{mm}$


Card type: EM/MF

Working voltage:  $\text{DC}12\text{V}\pm 10\%$

Reading Range:  $5\text{-}8\text{cm}$

Humidity:  $10\%$  to  $90\%$  RH

Door Opening Time:  $0\text{-}99\text{s}$ (Adjustable)

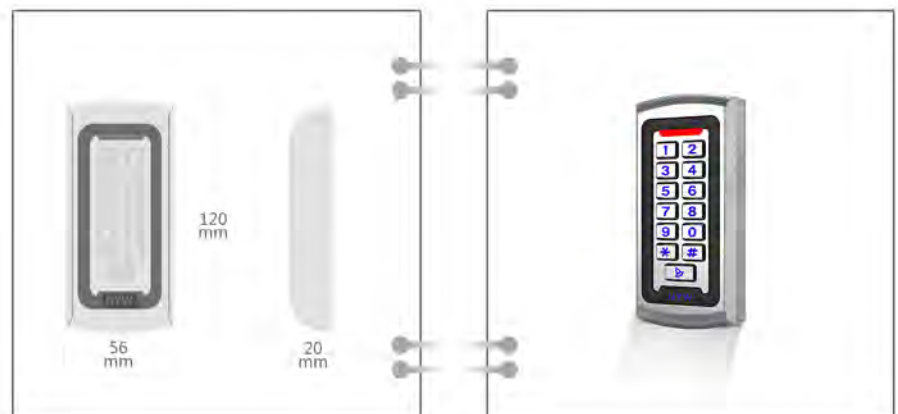

## Product feature

- ◆ Waterproof IP68
- ◆ Metal case, anti-vandal
- ◆ WG interface: WG26 Input/output Doorbell support and interface: bottom and circuit segregate, any doorbell can be connected
- ◆ Multi-function standalone access controller and reader, WG26 Input / output
- ◆ Capacity: 2000 cards/codes
- ◆ Three accesses: card, pin, card+pin